


3 Beam, Relieved, Stainless Steel Couplings with Set Screw Style Fixings

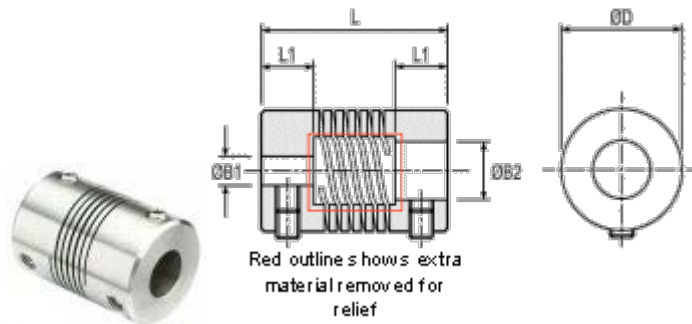

Dimensions and Order Codes

Coupling Size	Coupling Ref	ØD	L	L1 (1)	Bore diameters			Set Screw/ Cap screw	Angular Offset (2)	Parallel Offset (2)	Peak Torque (3)
					Min B1	Min B2	Max B1 & B2				
		mm	mm	mm	mm	mm	mm		deg	mm	Nm
6	720.06	6.4	12.7	3.2	1	2	3	M2	3	0.07	0.45
9	720.09	9.5	14.2	4.5	2	3	3.18	M2.5	3	0.1	0.5
13	720.13	12.7	19.1	6	3	4	5	M3	5	0.12	1
16	720.16	15.9	20.3	6.5	3	4	6.35	M4	5	0.12	1.8
19	720.19	19.1	22.9	6.5	4	4.76	8	M4	5	0.12	2.7
25	720.25	25.4	31.8	9	5	6	10	M5	5	0.12	6
32	720.32	31.8	44.5	12	6	8	14	M6	5	0.12	10

Table Notes:

1. Length of supported bore.
2. Max. compensation values are mutually exclusive.
3. Peak torque. Select a size where Peak Torque exceeds the application torque x service factor.

Materials

Couplings: Stainless Steel 303 S31. Fasteners: Stainless Steel

Temperature Range

-40°C to +140°C